



- [GOAL Events](#)
- [Advocate Magazine](#)
- [Aquademia Podcast](#)
- [Blog](#)
- [Contact](#)
-
-
-
-
-
- [Log In](#)



- [About](#)
 - [Who We Are](#)
 - [Our History](#)
 - [Our Team](#)
 - [Sustainable Development Goals](#)
 - [Careers](#)
- [Membership](#)
 - [Overview](#)
 - [Our Members](#)
 - [Corporate Membership](#)
- [Resources](#)
- [Certification](#)
 - [Best Aquaculture Practices](#)
 - [Best Seafood Practices](#)

Search...



[Log In](#)

- [About](#)
 - [Who We Are](#)
 - [Our History](#)
 - [Our Team](#)
 - [Sustainable Development Goals](#)
 - [Careers](#)
- [Membership](#)
 - [Overview](#)
 - [Our Members](#)
 - [Corporate Membership](#)
- [Resources](#)
- [Certification](#)
 - [Best Aquaculture Practices](#)
 - [Best Seafood Practices](#)
- [GOAL Events](#)
- [Advocate Magazine](#)
- [Aquademia Podcast](#)
- [Blog](#)
- [Contact](#)



Considerations for automatic feeding in shrimp ponds



27 January 2020 Dr. Carlos A. Ching



Proper use increases the farmer's profitability



Properly used, auto-feeders can be valuable tools to increase feeding efficiency and profitability in shrimp ponds.

For effective feed broadcasting by the auto-feeder in semi-intensive shrimp culture ponds, the spout of the feed dispenser should be about 80 to 100 cm above the surface of the water. The higher the hopper is above the water, the larger the feed broadcast area will be. However, in small intensive ponds where it is necessary to reduce the feeding area, the feeder spout should be only 50 cm above water surface.

In addition, the size of the pellet also affects the feeding area, because the larger the pellet, the further it spreads, as we can see in the following figure:

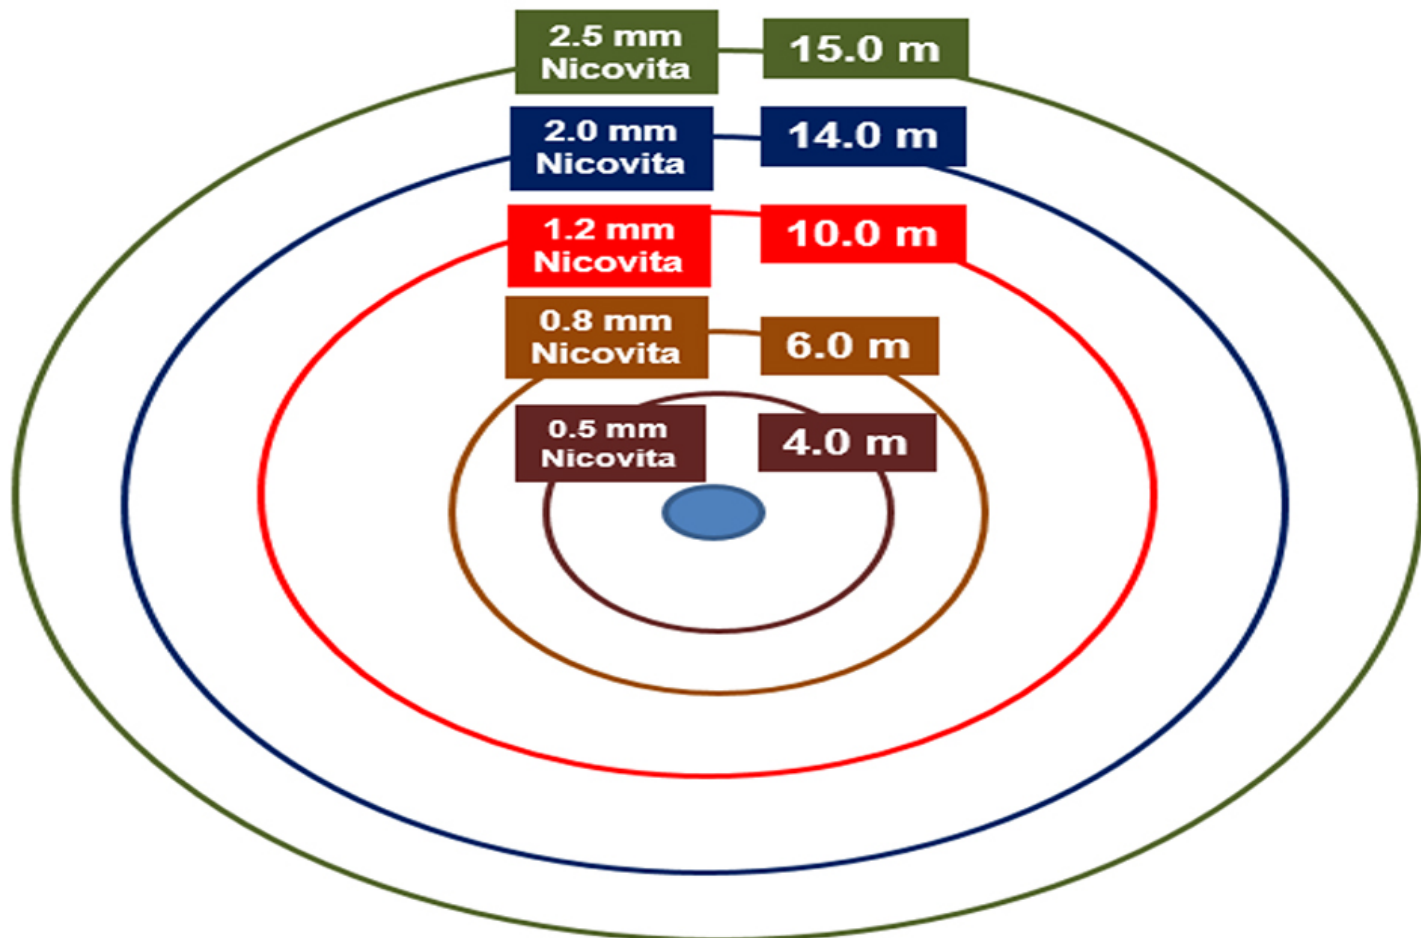


Fig. 1: Pellets (Nicovita) of different diameters and the distance they reach after being broadcasted by a solar auto-feeder placed at 1 meter above the water surface of semi-intensive shrimp ponds in Ecuador.

Another variable to consider is the dissolved oxygen concentration in the feeding area, because oxygen consumption by the hundreds of thousands of shrimp that congregate below and near each auto-feeder may deplete oxygen levels, making necessary the placement of mechanical aerators nearby.



Because of the higher oxygen consumption by the shrimp that congregate near the auto-feeder areas, mechanical aerators such as these long-arm paddlewheel aerators are needed near the feeding areas to help maintain adequate levels of dissolved oxygen.

The placement of auto-feeders at the optimum water depth is also important for a uniform distribution of shrimp for each feeder. Field experience tell us that the best water depth range for an auto-feeder in a pond without aeration is 1.00 to 1.30 meters, while in intensive ponds with strong aeration the best range is 1.40 to 1.60 meters. Uniform water depth and dissolved oxygen concentration in the area of automatic feeding results in an optimum distribution of the shrimp population in the pond.

Editor's note: Readers interested in more detailed information can check the following reference available (In Spanish) from the author: Ching C.A. 2017. Cómo incrementar la rentabilidad del cultivo de camarón con una adecuada implementación tecnológica. Aqua Expo Guayaquil, Ecuador 2017.

Evaluating shrimp biomass capacity per auto-feeder

Field results conclude that the appropriate biomass per feeder hopper results in better shrimp growth, FCR and survival rate of the shrimp. For instance, in semi-intensive shrimp production in large ponds (more than 4.0 ha.), the maximum biomass recommended for auto-feeding is 2,000 kg of shrimp per hopper. For intensive farming in small ponds (less than 1.0 ha.) with strong aeration, the maximum biomass recommended is 4,000 kg of shrimp per hopper.

Exceeding the biomass capacity of an auto-feeder can result in lower growth rate, higher FCR and lower survival rate of the shrimp, mainly because of the faster deterioration of water and soil quality resulting from an increase of organic matter and low oxygen concentration. In addition, a larger feeding load per hopper will reduce the life of the batteries, motor and other parts of the auto-feeders.

Bioremediation of the feeding area

During a shrimp production cycle and after harvest, the automatic feeding area requires bioremediation. The proper application of beneficial bacteria – like *Bacillus subtilis* and *Lactobacillus* spp. – is necessary to help maintain pond soil and water in adequate conditions, and support stable production of shrimp over time.



Because of the accumulation of organic matter (the round area of darker soil) that results around the auto-feeding area, seen here after harvest – as in this semi-intensive pond in Ecuador – bioremediation is required during and after each production cycle.

Evaluating auto-feeding techniques

Trials done by Kasetsart University during intensive culture of Pacific white shrimp at farms in Thailand showed the advantage of using automatic feeding over manual feeding, with the best results obtained with auto-feeding with sound detection using hydrophones (Table 1).

Ching, automatic feeding, Table 1

Parameter	Hand feeding (4X)	Timer feeding	Sound-detection feeding
Feed conversion ratio (FCR)	1.55	1.42	1.30
Average daily growth (ADG)	0.18	0.21	0.24
Mean harvest weight (g)	15.92	16.94	24.52

Table 1. Comparison of three different feeding techniques: Manual feeding, automatic feeding with time setting and automatic feeding with sound detection. Source: Napaumpaiporn et al. 2013 (<https://www.tci-thaijo.org/index.php/JFE/article/view/80653>).

A strategy used by some shrimp farmers in Ecuador to decrease the equipment investment costs associated with automatic feeding is to set up one sound detection feeder to monitor feeding activity by the shrimp, and then use this information with the auto-feeders with timers in a determined area of the farm. Programing of the auto-feeders with timers follows the curve of feed consumption of the auto-feeder using hydrophones to detect the sound of shrimp feeding activity. Later, feed consumption is verified by feed trays placed near the auto feeders.

Automatic feeding can use feeders with timers programmed to broadcast feed at set time intervals, or feeders that dispense feed based on shrimp activity (sound).

Perspectives

The basic but important considerations I have described for the proper use of auto-feeders in shrimp ponds can significantly help improve the profitability of shrimp pond culture.

It is also relevant to mention that, in many cases but not always, there is not a strong correlation between feed consumption and water temperature or dissolved oxygen concentration. Further studies with auto-feeders and water quality sensors are needed to better understand and predict shrimp feeding behavior at different times of the day/night, and between seasons.

Automatic feeding with the use of sensors for various water parameters – such as dissolved oxygen concentration, temperature, pH, alkalinity and rainfall – can be important tools for improved understanding of shrimp feeding behavior, and thus help manage feed more efficiently and decrease the highest cost in shrimp farming.

Fig. 2: Curves of a sound detection feeder used in a semi-intensive shrimp farm in Ecuador show a weak correlation between feed consumption and the curves of temperature or oxygen during different hours of day and night.

Now that you've finished reading the article ...

... we hope you'll consider supporting our mission to document the evolution of the global aquaculture industry and share our vast network of contributors' expansive knowledge every week.

By becoming a Global Seafood Alliance member, you're ensuring that all of the pre-competitive work we do through member benefits, resources and events can continue. Individual membership costs just \$50 a year.

Not a GSA member? Join us.

[Support GSA and Become a Member](#)

Author



Dr. Carlos A. Ching

Technical Assistance Manager, Nicovita – Vitapro Ecuador

[99,101,46,109,111,99,46,112,114,111,99,105,108,97,64,109,103,110,105,104,99,99]

Share

- [✉ Share via Email](#)
- [🐦 Share on Twitter](#)

- [f Share on Facebook](#)
- [in Share on LinkedIn](#)

Tagged With

[Shrimp automatic feeding](#) [Carlos A. Ching](#)

Related Posts

[Aquafeeds](#)

[Automatic feeding in shrimp aquaculture](#)

Controlled by timers, automatic feeders should be placed in deeper areas of ponds and away from aerators. Overfeeding is rare during automatic feeding, and pond bottom quality is maintained through grow-out cycles.

[Aquafeeds](#)

[Automated feeding systems in pond production of Pacific white shrimp](#)

Results of this study show that automated feeding systems are significantly more efficient than hand feeding in shrimp production ponds and that increases in feed input, application of adaptive technology and training of people to maintain the feeding system must all be considered.

[Innovation & Investment](#)

[Aquaculture Exchange: Mike Velings, Aqua-Spark](#)

Dutch investment firm Aqua-Spark has in just two years developed a modest portfolio, but a strategy that is poised for growth and impact across the entire aquaculture value chain, its CEO and co-founder told the Advocate.

[Innovation & Investment](#)

[Eight digital technologies disrupting aquaculture](#)

Eight digital technologies are disrupting aquaculture and having a profound impact on the way business operates – even displacing some established ones.

About The Advocate

The Responsible Seafood Advocate supports the Global Seafood Alliance's (GSA) mission to advance responsible seafood practices through education, advocacy and third-party assurances.

[Learn More](#)

Search Responsible Seafood Advocate



Advertising Opportunities

[2022 Media & Events Kit](#)

Categories

[Aquafeeds](#) [Aquafeeds](#) > [Health & Welfare](#) > [From Our Sponsors](#) > [Innovation & Investment](#) > [Intelligence](#) > [Responsibility](#) > [Fisheries](#) > [Artículos en Español](#) >

Don't Miss an Article

Featured

- [Health & Welfare](#) [An update on vibriosis, the major bacterial disease shrimp farmers face](#)
- [Intelligence](#) [A seat at the table: Fed By Blue team says aquaculture needs a stronger voice](#)
- [Responsibility](#) [Quantifying habitat provisioning at macroalgae cultivation locations](#)

Popular Tags

All Tags ▼

Recent

- [Fisheries](#) [Second Test: Another filler for the fisheries category](#)
- [Fisheries](#) [Test: This is filler for the fisheries Category](#)
- [Aquafeeds](#) [Test Article](#)
- [Responsibility](#) [Study: Climate change will shuffle marine ecosystems in unexpected ways as ocean temperature warms](#)
- [Health & Welfare](#) [Indian shrimp researchers earn a patent for WSSV diagnostic tool](#)



- [About](#)
- [Membership](#)
- [Resources](#)
- [Best Aquaculture Practices \(BAP\)](#)
- [Best Seafood Practices \(BSP\)](#)
- [GOAL Events](#)
- [Advocate Magazine](#)
- [Aquademia Podcast](#)
- [Blog](#)
- [Contact](#)

Stay up to date with GSA

- 
- 
- 
- 
- 

Copyright © 2024 Global Seafood Alliance
All rights reserved.

[Privacy](#)

[Terms of Use](#)

[Glossary](#)