



- [GOAL Events](#)
- [Advocate Magazine](#)
- [Aquademia Podcast](#)
- [Blog](#)
- [Contact](#)

-
-
-
-
-

- [Log In](#)



- [About](#)
 - [Who We Are](#)
 - [Our History](#)
 - [Our Team](#)
 - [Sustainable Development Goals](#)
 - [Careers](#)
- [Membership](#)
 - [Overview](#)
 - [Our Members](#)
 - [Corporate Membership](#)
- [Resources](#)
- [Certification](#)
 - [Best Aquaculture Practices](#)
 - [Best Seafood Practices](#)

Search...



[Log In](#)

- [About](#)
 - [Who We Are](#)
 - [Our History](#)
 - [Our Team](#)
 - [Sustainable Development Goals](#)
 - [Careers](#)
- [Membership](#)
 - [Overview](#)
 - [Our Members](#)
 - [Corporate Membership](#)
- [Resources](#)
- [Certification](#)
 - [Best Aquaculture Practices](#)
 - [Best Seafood Practices](#)
- [GOAL Events](#)
- [Advocate Magazine](#)
- [Aquademia Podcast](#)
- [Blog](#)
- [Contact](#)



Energy use in aquaculture pond aeration, Part 2



13 January 2020 Claude E. Boyd, Ph.D.



Internal combustion engines, drive trains, potential for energy conservation



Based on Prof. Boyd’s calculations, the efficiency of shrimp pond aeration could be improved to save a considerable quantity of energy. Photo by Darryl Jory.

Diesel and other internal combustion engines have much lower energy efficiencies than do electric motors (Table 1), but end-use energy from these two types of power units have different relationships to primary fuels. On average, the efficiency of grid electricity is about 33 percent from primary fuel to meter at point of use. When 1 Megajoule (MJ, a unit of measurement of energy) of primary energy in coal or other fuel is combusted at a power generating plant, an average of about 0.33 MJ can be delivered to the 2-hp motor of an electric aerator at a shrimp farm. Small motors are about 79 percent efficient, and 0.26 MJ of energy (0.33 MJ ×0.79) will be available from the aerator motor shaft – an overall efficiency of 26 percent.

Boyd, aeration Pt. 2, Table 1

Electric motors Efficiency* (%)		Small (<25 hp), stationary internal combustion engine Efficiency (%)	
1-4 hp	78.8	Ethanol (E100)	20-25
5-9 hp	84.0	Liquid propane gas (LPG)	25-30
10-19 hp	85.5	Gasoline	20-30
20-49 hp	88.5	Diesel	28-32

Table 1. Efficiencies of small, electric motors and small, stationary internal combustion engines.

*https://www.engineering toolbox.com/electrical-motor-efficiency-d_655.html.

In truth, the overall efficiency at which fuel energy is converted to output shaft energy is similar for electric motors and internal combustion engines. Although internal combustion engines operating on different fuels have similar efficiencies, fuels have different energy contents per unit volume (Table 2). An engine running on ethanol will use a greater volume of fuel to produce the same energy output than will an engine operating on diesel fuel, because ethanol has a lower energy content per liter than does diesel fuel. A fuel of lower energy content may be less economical or more economical than a fuel of greater energy content, depending on the price of each fuel per liter.

Boyd, aeration Pt. 2, Table 2

Fuel	Energy content (1)	Embodied energy factor
Ethanol (E100)	21.27 MJ/L	1.49 (2)
Ethanol (E85)	22.58 MJ/L	1.34 (3)
LPG (liquid propane gas)	23.48 MJ/L	1.12 (4)
Gasoline (no ethanol)	31.80 MJ/L	1.36 (4)
Gasoline (10% ethanol)	31.25 MJ/L	1.37 (3)
Biodiesel	33.32 MJ/L	1.69 (5)
Diesel (No. 2)	35.80 MJ/L	1.28 (4)
Electricity	3.6 MJ/kW·hr	2.50

Table 2. Energy content (lower heating value) of common fuels and factors for including embodied energy in fuel energy calculations.

- (1) https://afdc.energy.gov/fuels/fuel_comparison_chart_pdf.
- (2) <http://large.stanford.edu/courses/2014/ph240/dikeou1/docs/ethanolnetenergy.pdf>
- (3) Calculated
- (4) <http://www.iea.org/statistics/resources/manuals/>
- (5) <https://.adfc.energy.gov/files/pdfs/3229.pdf>

Internal combustion engines, like electric motors, should be operated at around 75 percent full load to assure greater service life and efficiency. While engines consume fuel under no load, the percentage full-load fuel used when an engine is idling at no load is lower than the percentage of full-load electricity used by a motor running under no load (Fig. 1). The fuel consumption of an engine declines with load in an approximately linear manner, and load can be estimated from fuel use. A typical, small diesel engine uses about 0.23 L/hr. fuel per horsepower-hour (0.31 L/hr. per kilowatt-hour).

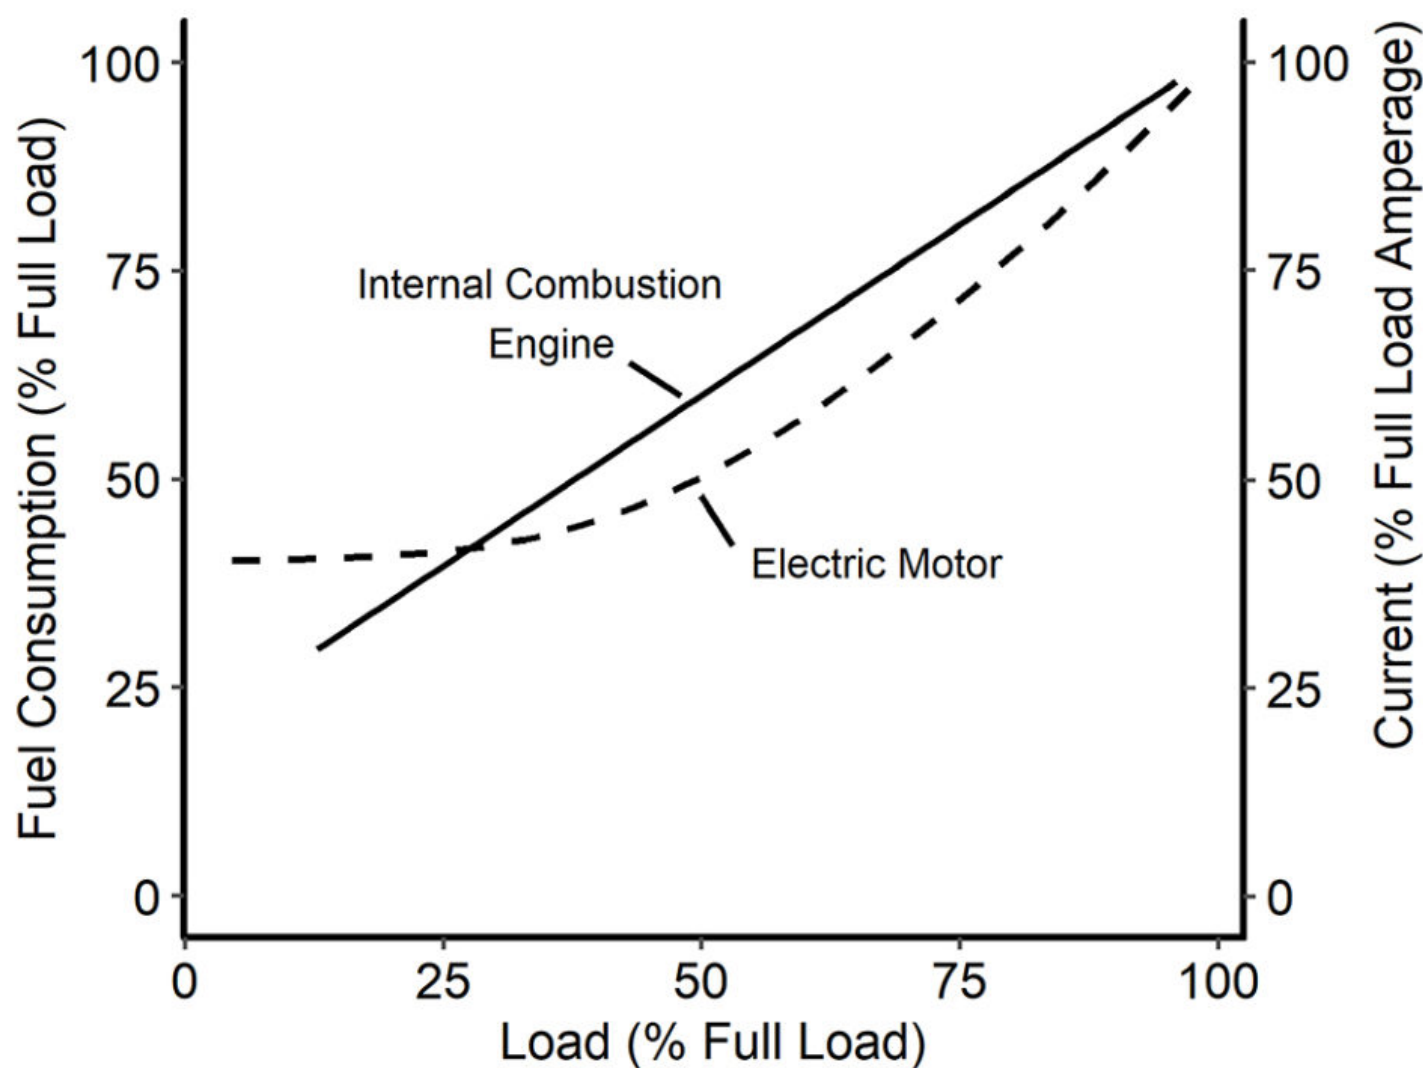


Fig. 1: Load versus fuel use by internal combustion engines and current use by electric motors (prepared with information from http://dieselserviceandsupply.com/Diesel_Fuel_Consumption.aspx and from <http://energy.gov/sites/prod/files/2014/04/f15/10097517.pdf>).

Output shaft speeds of small, internal combustion engines usually are [around 3,000 rpm](#). The most common aerator in shrimp farming is the paddlewheel aerator, and paddlewheels usually are operated at speeds of 60 to 120 rpm. Output shaft speeds of both electric motors and internal combustion engines must be reduced for paddlewheel application.

Drive trains

Propeller-aspirator-pump aerators and vertical-pump aerators operate at the speed of their motor shafts. Only a single coupling usually is necessary between motor and aerator shaft. However, these aerator types are not as common in shrimp farming as the paddlewheel aerator.

There are three main types of paddlewheel aerators. The 1- and 2-hp Asian floating, electric paddlewheel aerators, have a motor with a two directional gear-reducer mechanism mounted on floats, with a shaft upon which the paddlewheels are mounted extending from each side of the gear-reducer.

Views of Asia-style, small, electric, floating paddlewheel aerators.

The second type, a 5- or 10-hp aerator, which will be called a U.S. catfish pond paddlewheel aerator, is used sometimes in shrimp ponds in the western hemisphere. The motor of this kind of aerator is mounted on one end of a flotation platform, there is a gear box or other speed reduction mechanism between the motor, and a hub upon which paddles are welded to form a paddlewheel.

Views of U.S. catfish pond paddlewheel aerators.

In the first two kinds of aerators, the rotating shafts of the paddlewheels must be supported by bearings or other mechanisms that allow rotation with a minimum friction loss. These aerators have relatively high efficiency of energy transfer from motor shaft to paddlewheel shaft – the efficiency usually is 90 to 95 percent.

The third type of paddlewheel aerator is the so-called long-arm aerator popular in Thailand and some other Asian countries. The paddlewheel is mounted on floats installed in the pond, and the engine or motor is mounted on the pond bank. The speed of the engine or motor output shaft usually is reduced by V-belts or chains and sprockets in which two shafts (often called jackshafts) are used to diminish the motor output shaft speed to the desired paddlewheel speed.

Views of long-arm aerators popular in Asian countries. Photos by Darryl Jory.

The equation for relating speeds of driver shafts to driven shafts for pulleys (sheaves) and belts is:

$$D_1 \times \text{RPM}_1 = D_2 \times \text{RPM}_2$$

where D_1 and D_2 = pitch or flat-face diameters of driver and driven pulleys, respectively, and RPM_1 and RPM_2 are speeds of driver and driven shafts, respectively.

The equation for speed reduction by chains and sprockets is similar to that for speed reduction by belts and pulleys:

$$T_1 / T_2 = \text{RPM}_1 / \text{RPM}_2$$

where T_1 and T_2 = teeth on driver and driven sprockets, respectively, and RPM_1 and RPM_2 are speeds of the driver and driven shafts, respectively.

The principle of the jackshaft mechanism often used to reduce motor speed when driving a paddlewheel aerator from an engine or motor on the pond embankment can be explained by an example. A 12-cm pulley could be placed on the motor shaft (1,735 rpm) and a 70-cm pulley mounted on a short-driven shaft mounted in a metal frame. The driven shaft would turn at 297 rpm [(12 cm)(1735 rpm) = (70)(RPM_2); $\text{RPM}_2 = 297$] which is still too fast for the paddlewheel.

The first driven shaft could have a 15-cm pulley attached to it and connected by belt with a 50-cm pulley to a second shaft mounted in the metal frame. The second driven shaft would rotate at 89 rpm [(15 cm)(297 rpm) = (50 cm)(RPM_2); $\text{RPM}_2 = 89$] – a speed suitable for the paddlewheel. The two jackshafts would have to be firmly mounted in bearings supported in a metal frame beside the motor shaft.

The output shaft of the jackshaft mechanism must be connected by a drive shaft to the aerator shaft. The drive shaft must extend downward at an angle to the shaft of the paddlewheel aerator mounted on floats on the pond. This usually is accomplished by connecting shafts by aid of universal joints. At many farms, directional gear mechanisms also are used in the drive train to allow power to be distributed to multiple floating paddlewheels.

The devices used to slow rotation speeds, connect shafts, and change directions of power transmission in the drive train incur energy losses. Typical efficiencies are V-belt drives, [90 to 95 percent](#); roller chain drives, 95 to 98 percent; gear boxes, [85 to 90 percent](#). Energy loss is small (~1 to 2 percent) in couplings that are properly designed and installed, but misalignment of couplings and vibrations in shafts result in much larger losses of energy.

At Asian shrimp farms, the shafts between the driver shaft of the jackshaft mechanism and the aerator shaft usually is a long, 3.75 to 5 cm diameter, galvanized water pipe which vibrates considerably and misalignment between shafts and couplings are obvious. There are no studies (to my knowledge) of energy loss in the drive trains of long-arm paddlewheel aerators. The overall loss is likely at least 30 to 40 percent when only one aeration unit is operated from a motor or engine of a long-arm aerator. Greater losses no doubt are incurred with multiple long-arm aerators powered from a single engine or motor.

Potential for energy conservation

The large, floating electric paddlewheel aerators used on U.S. catfish farms are about 30 percent more efficient in transferring dissolved oxygen than are floating, electric aerators used in Asia. Based on the “rule of thumb” of 2.5 hp/MT shrimp for Asian paddlewheel aerators, the aerator rate could be reduced to 1.75 hp/MT of shrimp by use of the U.S.-style paddlewheel aerators. The drive train efficiencies are probably about 70 percent for long-arm aerators and 90 percent for Asian, floating, electric paddlewheel aerators. As a result, about 3.22 hp/MT of shrimp should be required for long-arm paddlewheel aerators. Energy use would be 11.5 GJ/MT of shrimp with Asian floating, electric aerators.

By using long-arm aerators, the energy use would be increased by the ratio 3.22 hp/MT/2.5 hp/MT, which would result in energy use of 14.8 GJ/MT. Likewise, by use of the larger US floating paddlewheel aerators, energy use could be reduced to 8.1 GJ/MT. According to an average aeration schedule of

16 hr./day and 80 days/crop, aerators would run for 1,440 hour/crop or 4,637 hp-hr for a diesel-powered, long-arm aerator. At fuel consumption of 0.23 L/hp-hr, 1,067 liters of diesel fuel would be consumed per MT of shrimp. This amounts to 38.2 GJ/MT of shrimp produced.

Perspectives

The estimates above are for direct energy use. Applying embodied energy factors for fuels from Table 2 give total energy use as: U.S. style, floating, electric paddlewheel aeration, 20.25 GJ/MT shrimp; Asian style, floating, electric paddlewheel aerator, 28.8 GJ/MT shrimp; electric-powered, long-arm aerator, 37 GJ/MT shrimp; and diesel-powered, long-arm aerator, 48.9 GJ/MT shrimp.

These calculations are based on certain assumptions and obviously subject to uncertainty, but they suggest that the efficiency of shrimp pond aeration could be improved to save a considerable quantity of energy. Assuming that 4 million MT of shrimp are produced in aerated ponds, each 1 GJ/MT reduction in energy use would reduce energy use in penaeid shrimp farming by 4 million GJ or roughly 830 million kW-hr (71,367 MT of oil or 488,234 barrels of oil equivalent).

There would be both energy conservation and farm-level economic benefits to improving the energy efficiency of shrimp pond aeration.

Now that you've finished reading the article ...

... we hope you'll consider supporting our mission to document the evolution of the global aquaculture industry and share our vast network of contributors' expansive knowledge every week.

By becoming a Global Seafood Alliance member, you're ensuring that all of the pre-competitive work we do through member benefits, resources and events can continue. Individual membership costs just \$50 a year.

Not a GSA member? Join us.

[Support GSA and Become a Member](#)

Author



Claude E. Boyd, Ph.D.

School of Fisheries, Aquaculture and Aquatic Sciences
Auburn University
Auburn, Alabama 36849 USA

[117,100,101,46,110,114,117,98,117,97,64,49,101,99,100,121,111,98]

Share

- ✉ [Share via Email](#)
- 🐦 [Share on Twitter](#)
- f [Share on Facebook](#)
- in [Share on LinkedIn](#)

Tagged With

[energy use](#) [internal combustion engines](#) [drive trains](#) [energy conservation potential](#) [aeration](#) [Claude E. Boyd](#)

Related Posts

[Responsibility](#)

[Energy use in aquaculture pond aeration, Part 1](#)

Prof. Boyd discusses energy use in aeration for aquaculture production systems, along with rates, types of aerators, motors and electricity generation.

[Responsibility](#)[Evaporation affected by sunlight, temperature, wind](#)

Evaporation of water from ponds is influenced by solar radiation, air and water temperature, and wind velocity. Control of aquatic plants can yield some reduction.

[Innovation & Investment](#)[High-density shrimp producer wins innovation award](#)

Camanor Produtos Marinhos Ltda. operates a land-based, multi-species concept for sustainable shrimp production called AquaScience. The Global Aquaculture Alliance has named Camanor the winner of its annual Aquaculture Innovation and Leadership award. Director Werner Jost discusses the process.

[Responsibility](#)[Tractor-powered paddlewheels provide emergency pond aeration](#)

Even with dedicated aerators, aquaculture farms can experience stress and mortality in culture animals due to low dissolved oxygen concentrations in pond water. Simple tractor-powered aerators offer a quick and portable solution to low dissolved oxygen levels that provides strong emergency aeration and water movement.

About The Advocate

The Responsible Seafood Advocate supports the Global Seafood Alliance's (GSA) mission to advance responsible seafood practices through education, advocacy and third-party assurances.

[Learn More](#)

Search Responsible Seafood Advocate

**Advertising Opportunities**[2022 Media & Events Kit](#)**Categories**

[Aquafeeds](#) > [Health & Welfare](#) > [From Our Sponsors](#) > [Innovation & Investment](#) > [Intelligence](#) > [Responsibility](#) [Responsibility](#) > [Fisheries](#) > [Artículos en Español](#) >

Don't Miss an Article

Featured

- [Health & Welfare](#) [An update on vibriosis, the major bacterial disease shrimp farmers face](#)
- [Intelligence](#) [A seat at the table: Fed By Blue team says aquaculture needs a stronger voice](#)
- [Responsibility](#) [Quantifying habitat provisioning at macroalgae cultivation locations](#)

Popular Tags

All Tags ▼

Recent

- [Fisheries](#) [Second Test: Another filler for the fisheries category](#)
- [Fisheries](#) [Test: This is filler for the fisheries Category](#)
- [Aquafeeds](#) [Test Article](#)
- [Responsibility](#) [Study: Climate change will shuffle marine ecosystems in unexpected ways as ocean temperature warms](#)
- [Health & Welfare](#) [Indian shrimp researchers earn a patent for WSSV diagnostic tool](#)



- [About](#)
- [Membership](#)
- [Resources](#)
- [Best Aquaculture Practices \(BAP\)](#)
- [Best Seafood Practices \(BSP\)](#)
- [GOAL Events](#)
- [Advocate Magazine](#)
- [Aquademia Podcast](#)
- [Blog](#)
- [Contact](#)

Stay up to date with GSA

- [@](#)
- [f](#)
- [X](#)
- [in](#)

- 

Copyright © 2024 Global Seafood Alliance

All rights reserved.

[Privacy](#)

[Terms of Use](#)

[Glossary](#)